

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 March 2005 (24.03.2005)

PCT

(10) International Publication Number
WO 2005/026482 A1

(51) International Patent Classification⁷: **E05C 7/06**,
7/04, E05B 65/08

(21) International Application Number:
PCT/FI2003/000666

(22) International Filing Date:
12 September 2003 (12.09.2003)

(25) Filing Language: Finnish

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **URPOLAHTI, Jouko** [FI/FI]; Mäntymaantie 1,
FIN-28560 Pori (FI).

(74) Agent: **NIEMINEN, Taisto**; Patenttitoimisto T Nieminen
Oy, Kehräsaari B, FIN-33200 Tampere (FI).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: FOOT BOLT FOR A SLIDING DOOR OR SIMILAR

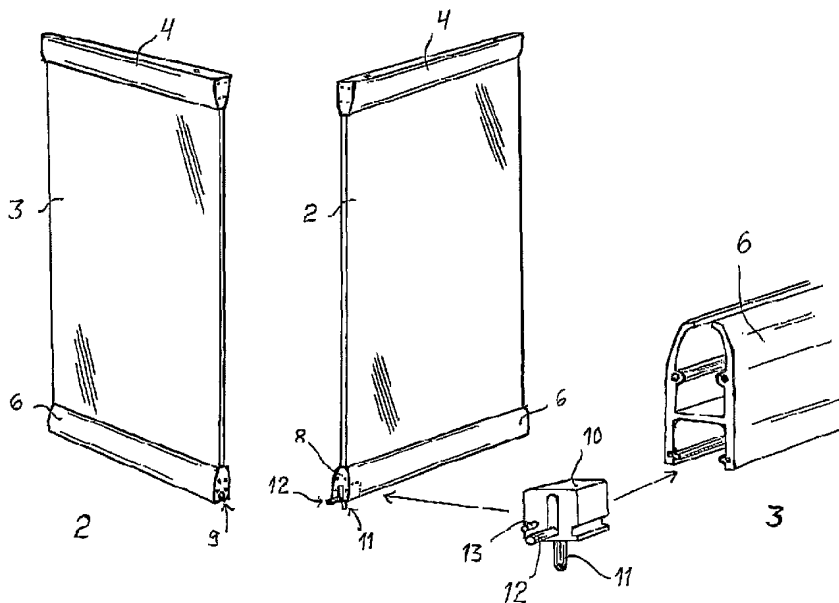

(57) Abstract: A foot bolt (10) of a sideways movable sliding door or a similar element (1-3), comprising a part locking the element in the base, such as a pin fitting in the hole in the base and which foot bolt construction further comprising a counterpart (9) in the next element movable beside it, in which counterpart the part (13) in the edge of the preceding element can be fitted so that the adjacent elements get sideways interlocked and that on moving the elements in the opposite direction pushing the last brought element from beside the preceding element opens the locking of the preceding element from the base. The pin fitting in the hole in the base is intended to be manually pressed for instance by the foot in the hole.

WO 2005/026482 A1